


CET T1 / CEPT / ISDN-PRI TRANSFORMERS

- UL Approved to UL1459 #E167631, UL 1950

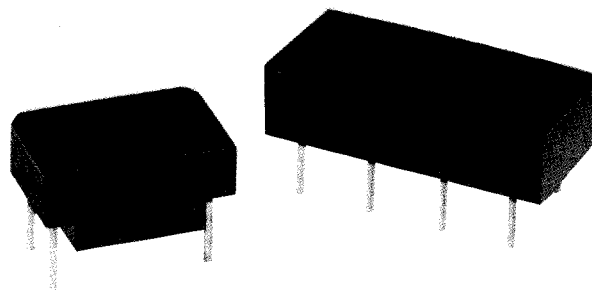

Single and Dual Through-hole

Part Number	Turns Ratio	OCL mH min.	Cw/w Pf max.	L μ H max.	DCR pri Ω max.	DCR sec Ω max.	Package/ Schematic	Primary Pins
CT-64931	1:1:1(2CT)	1.20	25	.50	.70	.70	S1/SS2	
CT-64932	1:1:1	2.00	40	.50	.70	.70	S1/SS2	
CT-64933	1CT:3CT	1.20	30	.50	.70	1.60	S1/SS4	1-5
CT-64934	1:1	1.20	25	.50	.70	.70	S1/SS1	
CT-64935	1:1CT	.06	23	.75	.60	.60	S1/SS3	2-6
CT-64936	1CT:1	1.20	25	.80	.70	.70	S1/SS3	1-5
CT-64937	1:1.36	1.20	35	.80	.70	.70	S1/SS1	5-6
CT-64938	1:1.26CT	.06	23	.75	.60	.60	S1/SS3	2-6
CT-64940	1:1:1.58	.30	30	.60	.40 & .40	.60	S1/SS2	1-4(2,3 SH)
CT-64941	1:1:2	.80	30	.60	.40 & .40	.60	S1/SS2	1-4(2,3 SH)
CT-64942	1:1:2.62	.80	30	.40	.40 & .40	.60	S1/SS2	1-4(2,3 SH)
CT-64943	1CT:2CT	1.20	30	.55(4)	.70	1.10	S1/SS4	1-5
CT-64944	2CT:1CT	2.00	30	1.50	.70	.40	S1/SS4	1-5
CT-64945	2.53CT:1	2.00	20	1.50	1.0	.50	S1/SS3	1-5
CT-65351	1:2CT	1.20	40	.50	.70	1.10	S1/SS3	2-6
CT-65352	1:2CT	2.00	40	.50	.70	1.40	S1/SS3	2-6
CT-65363	1:4CT	.50	40	1.00	.50	1.50	S1/SS5	1-5
CT-65379	1:1.14CT	1.20	35	.80	.70	.80	S1/SS5	1-5
CT-65415	1CT:2CT	1.20	30	.55	.70	1.10	S1/SS4	1-5
CT-65388	1:1.15CT	1.50	35	0.60	0.70	0.90	S1/SS3	2-6
CT-65389	1:1:1.266	1.50	35	0.40	0.70	0.90	S1/SS3	2-6
CT-65558	1:2.3CT	1.20	35	0.80	0.70	1.20	S1/SS5	1-5
CT-65586	1:1.36CT	1.20	35	0.80	0.70	0.90	S1/SS5	1-5
CT-65755	1CT:1CT	1.20	25	0.80	0.80	0.80	S1/SS4	1-5
CT-65340	1:1.36	1.20	35	0.80	0.90	1.20	S1/SS1	5-6
CT-65770	1:1.15CT	1.50	40	0.80	0.90	1.00	S1/SS3	2-6
CT-65771	1CT:2CT	1.20	45	0.60	1.00	2.00	S1/SS4	2-6
CT-65778	1CT:1CT	1.20	50	1.10	1.00	1.00	S1/SS4	1-5
Dual Packages								
CT-64951	1:2CT; 1:2CT	1.20	30	.50	.70 & .70	1.20 & 1.20	D1/DS1	14-12, 5-7
CT-64952	1:2CT; 1:1.36	1.20	35	.50; .80	.80 & .80	1.20 & 1.0	D1/DS2	14-12, 5-7
CT-64953	1:2CT; 2CT:1	2.00	45	.60; .80	.70 & .70	1.20 & 1.20	D1/DS3	14-12, 10-8
CT-64954	1CT:2CT; 1:1	1.20	30	.55(4); .50	.70 & .70	1.20 & .70	D1/DS4	1-3, 10-8
CT-64955	1.58:2CT; 1.58:1	.80	30	.50	1.60 & 1.60	.70 & .30	D1/DS5	1-3, 5-7
CT-64956	12:2CT; 2:1	.80	30	.60	.50 & .50	.50 & .20	D1/DS5	1-3, 5-7
CT-64957	2.62:2CT; 2.62:1	1.20	30	.80	.60 & .60	.50 & .30	D1/DS5	1-3, 5-7
CT-64958	1:1; 1CT:1	1.20	30	.50; .80	.70 & .70	.70 & .70	D1/DS5	5-7, 14-12
CT-65565	1:1.15CT; 1:2CT	1.50; 1.20	35; 40	.60; .50	.70 & .70	70 & .70	TD1/DS1	14-12,5-7
CT-65566	1:1:1.266; 1:2CT	1.50; 1.20	35; 40	.50; .40	.70 & .70	.90 & 1.10	TD-1/DS1	14-12, 5-7
Extended Temperature Range Dual Transformers								
CT-65567	1:1.15CT & 1:2CT	1.50 & 1.20	40 & 60	.80 & .80	.90 & .90	1.10 & 1.70	TD-1/DS1	14-12,5-7
CT-65568	1:1:1.266 & 1:2CT	150 & 1.20	50 & 60	.80 & .80	.90 & .90	1.10 & 1.70	TD-1/DS1	14-12,5-7
CT-65774	1CT:2CT & 1:1.36CT	1.20 & 1.20	50 & 50	.96 & .80	1.00 & 1.00	1.70 & 1.20	TD-1/DS8	14-12,5-7



