





CE Approved

Product Model	Rated Power	Voltage(%) Regulation	Efficiency (%)	Weight (kg)	Dimension(mm)	
					Height	Diameter
CTHP25	25VA	20	73.0	0.4	25	68
CTHP30	30VA	16.5	76.6	0.5	25	72
CTHP40	40VA	15.8	80.2	0.6	33	79
CTHP50	50VA	15.2	82.4	0.7	33	84
CTHP63	63VA	13.8	83.5	0.8	34	89
CTHP80	80VA	12.6	84.7	1.0	34	95
CTHP100	100VA	11.2	86.5	1.3	35	105
CTHP105	105VA	10.8	86.8	1.4	35	109
CTHP125	125VA	9.6	87.3	1.6	40	110
CTHP150	150VA	7.2	88.1	2.0	42	116
CTHP160	160VA	6.6	88.6	2.1	42	118
CTHP200	200VA	6.1	89.7	2.4	48	120
CTHP250	250VA	5.5	90.3	2.9	50	127
CTHP300	300VA	5.2	91.7	3.2	55	128
CTHP400	400VA	4.6	93.8	4.7	70	133
CTHP500	500VA	4.3	94.6	5.5	72	140
CTHP630	630VA	4.1	95.0	6.7	72	155
CTHP800	800VA	3.8	95.1	8.2	72	170
CTHP1000	1000VA	3.3	95.8	10.0	78	180
CTHP1250	1250VA	2.9	96.2	13.4	80	198
CTHP1600	1600VA	2.8	96.6	16	86	210
CTHP2000	2000VA	2.5	96.9	20.0	90	232



Toroidal Cores Typical Magnetization Curve

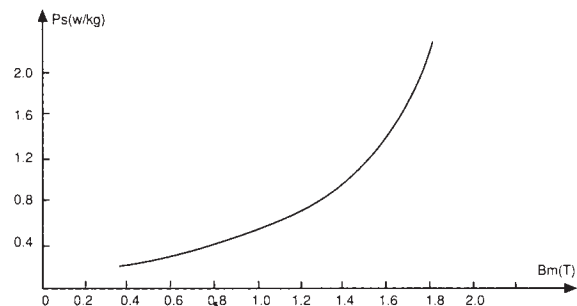

Toroidal Cores Typical Loss Curve